



CRL260 Series

July 2017

Rope Bonding Lead Solutions

CRL260 bonding leads are designed to withstand exceptional levels of flexing in combination with outstanding resistance to corrosion and salt attack. When tested to the flex endurance test in EN4199-001, they withstand over 5 million cycles.

Outperforming other existing aerospace standard leads by more than 5 times.


Particularly suited for dynamic applications in exposed areas such as external aircraft doors and flaps.

Operating Temperature

- Nickel-plated Cu: -65°C to +260°



Flex Endurance to EN4199-001 Choice of 5 Cross-Sectional Areas Range of Terminal Sizes

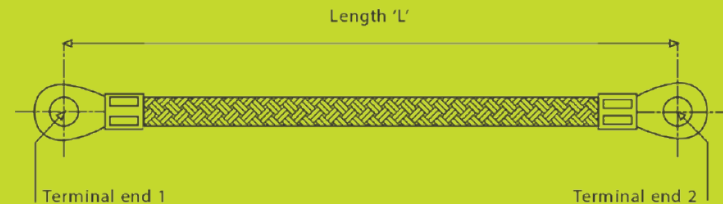

Terminal Availability: CRL260 nickel-plated copper

Code	Terminals	Availability for Cross-Sectional Area				
	Hole Ø	3.5mm ²	5.0mm ²	7.0mm ²	10.0mm ²	13.0mm ²
A	3.68mm	✓				
B	5.00mm	✓	✓	✓	✓	✓
C	6.73mm	✓	✓	✓	✓	✓
D	8.33mm	✓	✓	✓	✓	✓
E	9.91mm	✓	✓	✓	✓	✓

CRL260-5.0-200-A

Part Numbering example

Terminal Code:

See terminal availability see table below

Standard Lengths:

Min. 50mm and above
in 25mm increments

Cross Sectional Area

3.5 3.5mm² 5.0 5mm²
7.0 7mm² 10.0 10mm²
13.0 13mm²

Part Reference:

CRL260 Nickel plated copper

All information provided is believed to be reliable. We advise however that customers should separately evaluate the suitability of our products for their particular application. IS-Rayfast give no guarantee in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect, or consequential damage or damages from the sale, resale, transfer, use or misuse of the product.

Tel: +44 (0)1793 616700 • Email: sales@is-rayfast.com

www.is-rayfast.com

2 Lydiard Fields, Swindon, Wiltshire, SN5 8UB, UK.

