

DESCRIPTION:

HST PVC Sleeving is specially formulated to give high quality and value for money. Rated at 105°C, heat stabilized, it has good flame retardancy and meets the general requirements of UL224. Supplied in coils.


SPECIFICATION:

MATERIAL: PVC
OPERATING TEMPERATURE: -30°C to +105°C
SHRINK TEMPERATURE: 135°C
SHRINK RATIO: 2:1
ELONGATION AT BREAK: 220%
TENSILE STRENGTH: 19 MPa
FLAMMABILITY: Self-Extinguishing
SPECIFICATION: UL224, RoHS compliant



COLOUR OPTIONS:

HOW TO ORDER:
Add the required colour to the end of the part number.

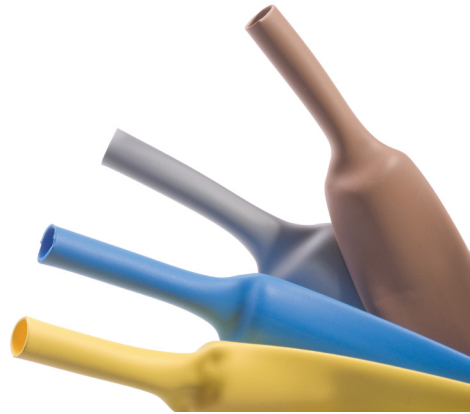

PART NUMBERS:

DIMENSIONS (mm)

PART NUMBER	MIN. SUPPLIED DIAMETER	RECOVERED DIAMETER	NOM. RECOVERED WALL	COIL LENGTH (m)
COILS				
HST 24 (COLOUR)	2.4	1.2	0.40	100
HST 32 (COLOUR)	3.2	1.6	0.45	100
HST 48 (COLOUR)	4.8	2.4	0.50	100
HST 64 (COLOUR)	6.4	3.2	0.60	100
HST 95 (COLOUR)	9.5	4.8	0.60	100
HST 127 (COLOUR)	12.7	6.4	0.65	50
HST 160 (COLOUR)	16.0	8.0	0.80	50
HST 190 (COLOUR)	19.0	9.5	0.80	50
HST 254 (COLOUR)	25.4	12.7	1.00	30
HST 320 (COLOUR)	32.0	16.0	1.00	30
HST 381 (COLOUR)	38.1	19.0	1.00	30
HST 510 (COLOUR)	50.8	25.5	1.00	25
HST 762 (COLOUR)	76.0	38.1	1.00	25
HST 1016 (COLOUR)	102.0	51.0	1.30	25

Sizes 2.4 to 9.5mm are blown giving a round profile and sizes 12.7 to 10 are flat.