

## Product Highlights

- Working temperature -70°C to +125°C
- UL Recognized Component
- Wrappable design
- Secure closure
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Flexible
- Does not trap heat or humidity
- Also available laminated with reflective\* foil or polyester\*\* film

Please consult factory for more information about \*Hookit AL or \*\*Hookit PT.



## Hookit™

Bentley-Harris® Hookit is a lightweight, damage-resistant sleeving used to protect and dress wiring and hose assemblies. Its patented hook and integral loop closing feature eliminates the need for an open end for installation. Hookit oversleeve permits quick and easy access for inspection, rework or replacement of components.

The 100% polyester product is comprised of PET (Polyester) monofilament warp strands and PET multifilament weft strands which form the integral loop. The hook portion of the product is secured to the sleeving with a polyester thread.

Hookit oversleeve can easily be applied to even very long lengths of cable or hose runs. It can be applied without an open end, and easily removed and re-applied. Hookit is ideally suited for cost-effective long-length harness oversleeving, especially on larger sizes. In addition, post-assembly or retrofit applications can be made without removing end hardware and without circuit disturbance or service interruption. It may also be used when experience indicates a need to add protective sleeving or cosmetic covering on specific segments of wiring already installed.

Hookit has many applications in the aeronautical, marine, rail, automotive, electronic and general manufacturing industries.

**BentleyHarris®**  
Protection Products

Tel: +44(0) 1793616700 • Fax: +44(0) 1793 644304  
uksales@is-rayfast.com • export@is-rayfast.com  
[www.is-rayfast.com](http://www.is-rayfast.com)  
2 Lydiard Fields, Swindon, Wiltshire, SN5 8UB

**iS Rayfast**


# Performance Data

Properties	Test Method	Value
Operating Temperature Range		-40°C to + 125°C
Melt Temperature	ASTM D-2117	+250°C
Low Temperature Flexibility	MIL-DTL-23053E	-70°C
Smoke Density	ASTM E-1354	D <sub>mc</sub> = 1.44
Copper Corrosivity	MIL-I-23053	No Effect

# Product Specifications

Description	Recommended application range (mm)	Part number	Weight (g/100m)	Standard packaging (mm)
Hookit 13-0	Up to 13	5701001303S	2497	50
Hookit 19-0	Up to 19	5701001903S	3215	50
Hookit 25-0	Up to 25	5701002503S	3804	50
Hookit 32-0	Up to 32	5701003203S	4471	50
Hookit 38-0	Up to 38	5701003803S	5162	50
Hookit 45-0	Up to 45	5701004503S	5923	50
Hookit 51-0	Up to 51	5701005103S	7251	50

Standard color is black.

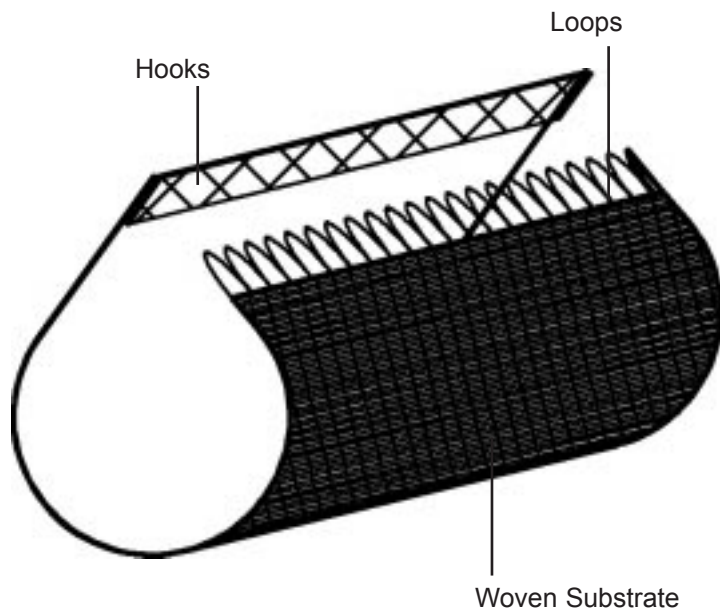

# Availability

Bentley-Harris® HOOKIT is available in sizes 13 to 51 mm. Standard color is black .

HOOKIT is supplied on cardboard spools or cut to length according to your specifications.

All numeric data shows average or typical values

# Part Numbering System

Example :	Description	Size	Colour	Quantity
	Hookit	19	0 (black)	50 m

