




ABRASION/MECHANICAL

ROUNDIT® 2000 ST

Product Highlights

- Operating temperature from -70°C to +150°C (-94°F to +302°F)
- Excellent abrasion resistance
- Self-closing tubular design
- Integrated closure and locating system
- Eliminates the need of additional taping
- Easy to apply

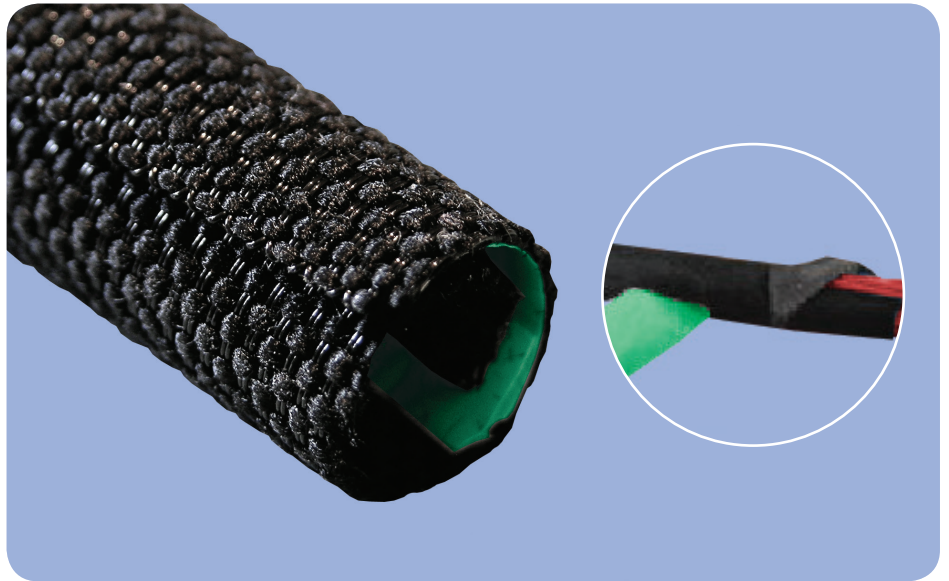

ROUNDIT® 2000 ST is a self-closing oversleeve designed to provide mechanical protection. ROUNDIT 2000 ST is made out of a woven substrate of monofilament and multifilament polyester yarns equipped with an adhesive tape. This unique design gives the adhesive tape the double advantage of holding the sleeve in place on the application and being a secure closing system.

ROUNDIT 2000 ST is a system which offers a high level of component protection and eliminates the need of additional taping. It is both flexible and lightweight.

ROUNDIT 2000 ST fits tightly on wire harnesses, saving space, without reducing the flexibility of the wire bundles it protects. It also maintains a circular profile when flexed. Its self-wrapping design allows for quick and easy bundling of wire and cable assemblies. It easily allows for breakouts and can be installed over completed assemblies.



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

RI2000ST_06102014

BentleyHarris®
Protection Products

 **FEDERAL
MOGUL**
Systems Protection

 **iS Rayfast**

Performance Data – ROUNDIT® 2000 ST

Property	Test Method	Result
Operating Temperature		-70°C to +150°C (-94°F to +302°F)
Heat Aging: 240 hrs. @ +175°C	ISO 6722	Neither visible degradation nor loss of flexibility

All numeric performance data shows average or typical values.

Standard Sizes

Commercial Part Number	Recommended Application Range mm		Standard Packaging m (ft)
	Min Ø	Max Ø	
ROUNDIT 2000 ST 7-0	5	7	500 (1640')
ROUNDIT 2000 ST 9-0	8	9	500 (1640')
ROUNDIT 2000 ST 12-0	10	12	350 (1148')
ROUNDIT 2000 ST 16-0	14	16	250 (820')
ROUNDIT 2000 ST 18-0	16	18	150 (492')
ROUNDIT 2000 ST 22-0	20	22	125 (410')
ROUNDIT 2000 ST 25-0	23	25	100 (328')
ROUNDIT 2000 ST 31-0	29	31	75 (246')

Availability

ROUNDIT® 2000 ST is available in diameters 7 to 31. Standard colour is black.

ROUNDIT 2000 ST is available in spools or cut according to your specifications.

Packaging is in accordance with GALIA standards (ODETTE).

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ROUNDIT 2000 ST	9	0 (black)	500 m

Tel: +44(0) 1793616700 • Fax: +44(0) 1793 644304
uksales@is-rayfast.com • export@is-rayfast.com

www.is-rayfast.com

2 Lydiard Fields, Swindon, Wiltshire, SN5 8UB




The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.

www.federalmogul.com/sp