

# Clamping Bands



## ICS-600 Band-Strap Series Part number and sizing guide

As part of IS-Rayfast's continued product portfolio expansion, we offer clamping bands used throughout industry for terminating screens onto connectors.

### Typical Applications

- Termination of screens onto connectors

### Features & Benefits

- Low profile design
- Light weight construction
- Space reduction
- Ease of installation

### Material & Packaging Specification

Clamping band - Precision constructed from 300 series Stainless Steel Passivate.

Packaging - Clamping bands come packaged in quantities from 1 to 100 pcs

For more information on the Clamping Bands range, please contact IS-Rayfast.

### Installation Tools

Standard Bands - Hand banding tool (600-058).


Pneumatic banding tool (600-067).

Microbands - Hand banding tool (600-061).

Pneumatic banding tool (600-068).

### ICSB-600-052


#### Standard band

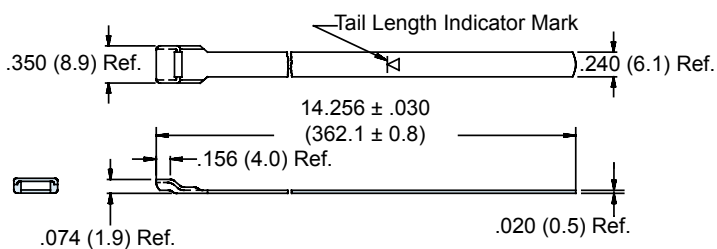

Band width.....	6.1mm
Head width.....	8.9mm
Length (±1.5mm).....	362.1mm
Band thickness.....	0.5mm
Head thickness.....	1.9mm
Double wrapped bands can be used for OD up to...	45.7mm

### ICSB-600-090


#### Extended length band

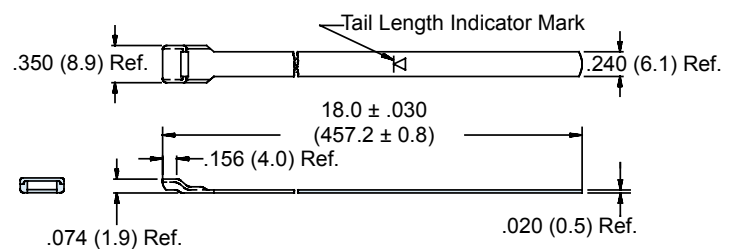

Band width.....	6.1mm
Head width.....	8.9mm
Length (±1.5mm).....	457.2mm
Band thickness.....	0.5mm
Head thickness.....	1.9mm
Double wrapped bands can be used for OD up to...	63.5mm

### ICSB-600-0057


#### Micro band

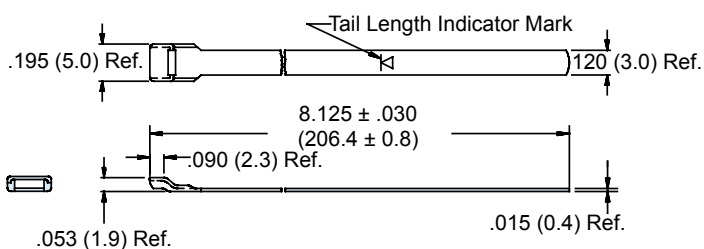

Band width.....	3.0mm
Head width.....	5.0mm
Length (±0.8mm).....	206.4mm
Band thickness.....	0.4mm
Head thickness.....	1.9mm
Double wrapped bands can be used for OD up to...	22.4mm

### ICSB-600-083

#### Extended length micro band

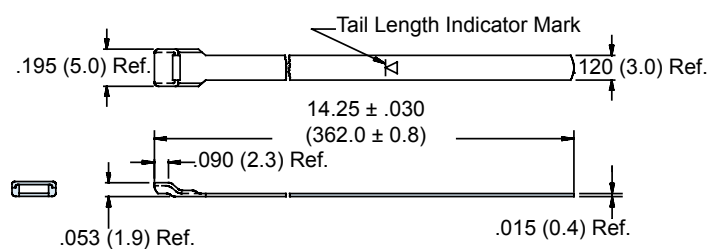

Band width.....	3.0mm
Head width.....	5.0mm
Length (±0.8mm).....	362.0mm
Band thickness.....	0.4mm
Head thickness.....	1.9mm
Double wrapped bands can be used for OD up to...	47.8mm

www.is-rayfast.com  
uksales@israyfast.com

Tel: +44(0) 1793 616700 · Fax +44(0) 1793 644304  
2 Lydiard Fields, Swindon, Wiltshire, SN5 8UB, UK.

